


Spiralbohrer DIN 338 HSS-G, mit reduziertem Schaft, Kreuzanschliff Twist drills DIN 338 HSS-G, reduced shank, split point

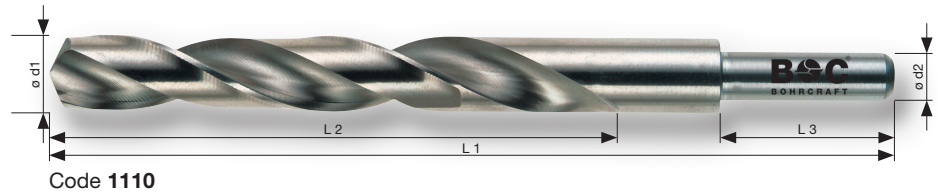

Code	P			M	K	N			S
	1.1 - 2.1	3.1 - 4.1	5.1	1.1 - 4.1	1.1 - 4.2	1.1 - 1.6	2.1 - 2.6	4.2	1.1 - 2.6
1110									

Spiralbohrer für normalharte Werkstoffe wie allgemeine Bau-
stähle, NE-Metalle und Gusseisen.

Twist drill for materials with normal tensile strength, e.g. in
general structural steels, non ferrous materials and cast iron.

Ø d1 mm	L 1 mm	L 2 mm	Ø d2 mm	L 3 mm		Artikel-Nr. Part-No.		Artikel-Nr. Part-No.
10,5	133	87	10	30	5	1110 01 01050	1	1110 07 01050
11,0	142	94	10	30	5	1110 01 01100	1	1110 07 01100
11,5	142	94	10	30	5	1110 01 01150	1	1110 07 01150
12,0	151	101	10	30	5	1110 01 01200	1	1110 07 01200
12,5	151	101	10	30	5	1110 01 01250	1	1110 07 01250
13,0	151	101	10	30	5	1110 01 01300	1	1110 07 01300
13,5	160	108	10	30	5	1110 01 01350	1	1110 07 01350
14,0	160	108	10	30	5	1110 01 01400	1	1110 07 01400
14,5	169	114	10	30	5	1110 01 01450	1	1110 07 01450
15,0	169	114	10	30	5	1110 01 01500	1	1110 07 01500
15,5	178	120	10	30	5	1110 01 01550	1	1110 07 01550
16,0	178	120	10	30	5	1110 01 01600	1	1110 07 01600
16,5	184	125	13	35	1	1110 01 01650	1	1110 07 01650
17,0	184	125	13	35	1	1110 01 01700	1	1110 07 01700
17,5	191	130	13	35	1	1110 01 01750	1	1110 07 01750
18,0	191	130	13	35	1	1110 01 01800	1	1110 07 01800
18,5	198	135	13	35	1	1110 01 01850	1	1110 07 01850
19,0	198	135	13	35	1	1110 01 01900	1	1110 07 01900
19,5	205	140	13	35	1	1110 01 01950	1	1110 07 01950
20,0	205	140	13	35	1	1110 01 02000	1	1110 07 02000
20,5	212	145	13	40	1	1110 01 02050	-	-
21,0	212	145	13	40	1	1110 01 02100	-	-
21,5	219	150	13	40	1	1110 01 02150	-	-
22,0	219	150	13	40	1	1110 01 02200	-	-
22,5	226	155	13	40	1	1110 01 02250	-	-
23,0	226	155	13	40	1	1110 01 02300	-	-
23,5	233	155	13	40	1	1110 01 02350	-	-
24,0	233	160	13	40	1	1110 01 02400	-	-
24,5	233	160	13	40	1	1110 01 02450	-	-
25,0	233	160	13	40	1	1110 01 02500	-	-